



HYDRINS

FOG-BASED HIGH-GRADE INERTIAL NAVIGATION SYSTEM
FOR HYDROGRAPHIC AND MULTIBEAM SURVEYS

HYDRINS is a high-performance inertial navigation system optimized for hydrographic surveys using multibeam echosounders. **HYDRINS** comprises a single compact unit and delivers highly accurate real-time position, heading, attitude and speed data. In addition to the real-time options, **HYDRINS** raw data can be post-processed using Delph INS™.

FEATURES

- All-in-one high-accuracy 3D positioning with heading, roll and pitch
- Smart Heave™
- Automatic GPS drop-out / multipath management
- Advanced post-processing software solutions (Delph INS)
- Compact, uses any kind of GPS (single antenna)
- Ethernet, web server (GUI)


BENEFITS

- Motion and heading not affected by GPS outages
- Accurate height compensation with GPS RTK
- A complete solution with easy-to-use yet powerful post-processing tools
- Fast and reliable installation on all vessels
- Network ready, intuitive user interface

APPLICATIONS • Multibeam survey • Hydrographic survey • Harbors and inland waterways



Courtesy of Geoplus

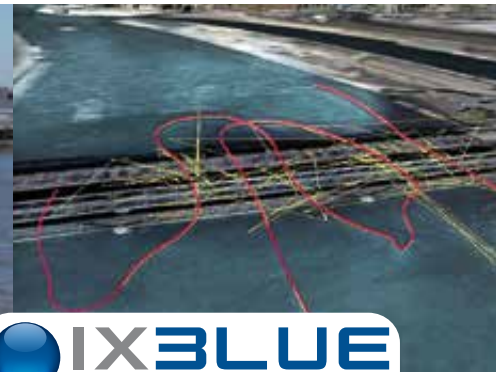

HYDRINS

TECHNICAL SPECIFICATIONS



IMO Certified
N° 19110
N° 19183

PERFORMANCE

Position accuracy real time

With GPS

Three times better than GPS

No aiding for 1 min / 2 min

0.8 m / 3.2 m (CEP 50)

Position accuracy post-processed

With GPS

Four times better than GPS

No aiding for 1 min / 2 min

0.2 m / 1m (CEP 50)

Heading accuracy

0.01 deg secant latitude RMS⁽¹⁾

Roll and pitch dynamic accuracy (no aiding)

0.01 deg RMS

Heave accuracy (Smart Heave)⁽²⁾

2.5 cm or 2.5% RMS

OPERATING RANGE / ENVIRONMENT

Operating / storage temperature

-20°C to 55°C / -40°C to 80°C

Rotation rate dynamic range

Up to 750 deg/s

Acceleration dynamic range

± 15 g

Heading / roll / pitch

0 to +360 deg / ±180 deg / ±90 deg

MTBF (observed)

80 000 hours

PHYSICAL CHARACTERISTICS

Dimensions (L x W x H)

180 x 180 x 162 mm

Weight

4.5 kg

Waterproof

IP66

INTERFACES

Serial

RS422 or RS232

Ethernet

100 MBit - UDP / TCP server / TCP client / WebGUI

Pulse

PPS, Trigger

Inputs / outputs

Configurable 7i / 5o - Pulse⁽³⁾ 4i / 2o - Configuration port

Baud rates

Up to 460 kbaud

Data output rate

0.1 Hz to 200 Hz

Power supply / consumption

24 VDC (20 - 32 V) / < 20 W

(1) Secant latitude = 1/cosine latitude

(2) Whichever is greater for periods up to 30 seconds. Smart heave is delayed by 100 s fixed value

Real-time heave accuracy is 5 cm or 5% whichever is greater

(3) Use GPS PPS pulse for accurate time synchronization of HYDRINS